

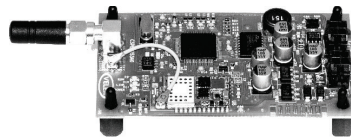



Bridge Modules allow the connectivity of the control devices for industrial refrigeration. Permit upload of operating variables of the units to the Cloud for the monitoring by the network internet and the reachability of devices for parametric configurations and firmware upgrade.

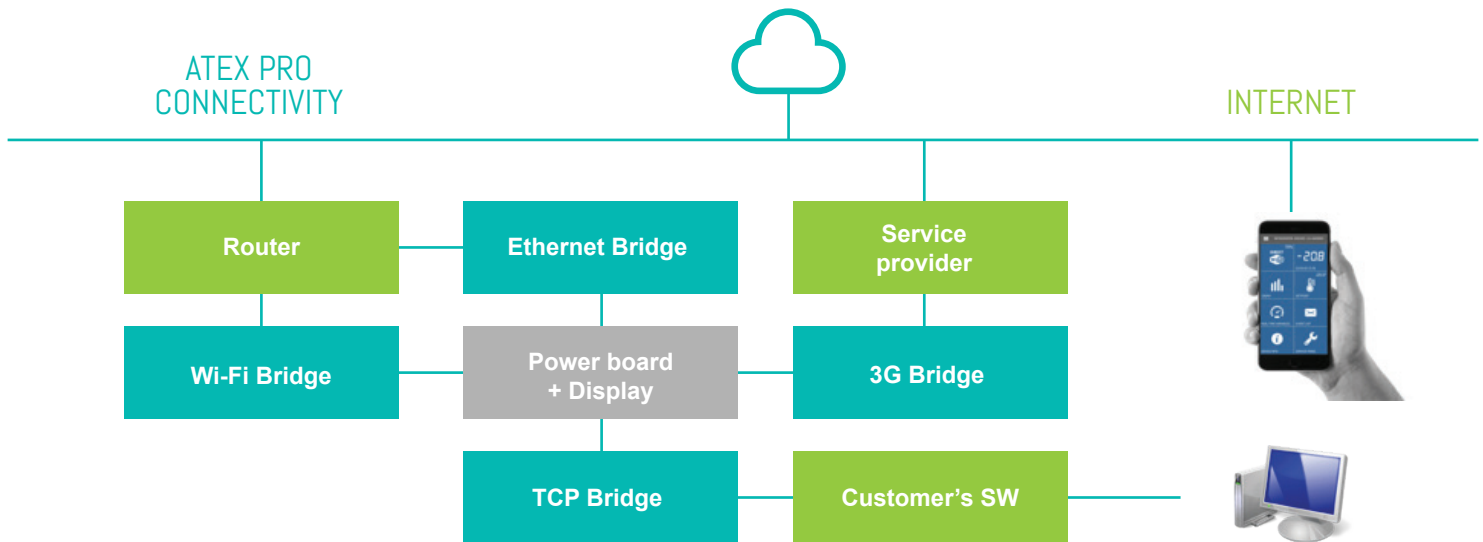

3G

Housing 3 DIN Module
 Quad-Band 850/900/1800/1900 MHz
 GPRS multi-slot class 10/8
 GPRS mobile station class B
 Compliant to GSM phase 2/2+
 - Class 4 (2W @850/900 MHz)
 - Class 1 (1W @ 1800/1900 MHz)
 2 x Canbus ports
 Antenna interface
 (SMA bend female port)
 Power supply throught Canbus cable

CODES

3G Europe: BT92331000
 3G Asia: BT92332000
 3G America: BT92333000

WI-FI

Housing 3 DIN Module
 Protocol 802.11 b/g/n
 Frequency 2.4 GHz
 Data Rate 11 Mb/s, 54 Mb/s, 65 Mb/s
 Power output 16.5 dBm
 2 x Canbus ports
 Antenna interface
 (SMA bend female port)
 Power Supply throught Canbus cable

CODE

BT92311000

ETHERNET

Housing 3 DIN Module
 Data Rate 1 Mb/s
 Ethernet Interface
 2 x Canbus ports
 Power Supply throught
 Canbus cable

CODE

BT92310000

TCP

Housing 3 DIN Module
 Modbus CAN/TCP ports
 Ethernet Interface
 Canbus cable

CODE

BT92310010